

B104-XL POWER PAK UNIT

PART NUMBER 51400


DESIGN AND OPERATIONAL FEATURES:

GASOLINE POWERED BRIGGS & STRATTON 4 HP, 4 CYCLE ENGINE
 OPTIONAL: GASOLINE POWERED HONDA 5 HP, 4 CYCLE ENGINE
 BOTH ENGINES USE LEAD FREE GASOLINE
 HIGH PRESSURE TWO-STAGE PUMPING SYSTEM
 4-WAY, 3-POSITION SELECTOR VALVE
 TWO TOOLS CAN BE CONNECTED TO THE POWER PAK SIMULTANEOUSLY
 NON-TOXIC MINERAL BASED HYDRAULIC OIL

POWER PAK PERFORMANCE CHARACTERISTICS:

PARAMETER

WEIGHT :	79.0 lbs.
LENGTH (L) :	24.0 in.
WIDTH (W) :	18.0 in.
HEIGHT (H) :	22.0 in.
 MAXIMUM OPERATING PRESSURE :	 10,500 psi
CAPACITY OF OIL RESERVOIR :	2 gals. U.S.
 DELIVERY OF PUMP, STAGE 1 :	 1.3 gpm.
DELIVERY OF PUMP, STAGE 2 :	0.28 gpm.


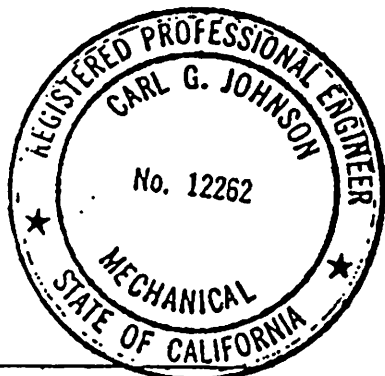


SEAL

Carl G. Johnson

CARL G. JOHNSON

August 28, 1990
DATE

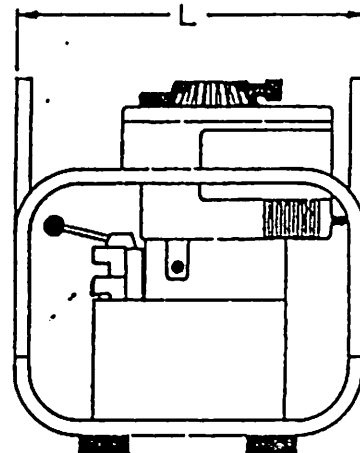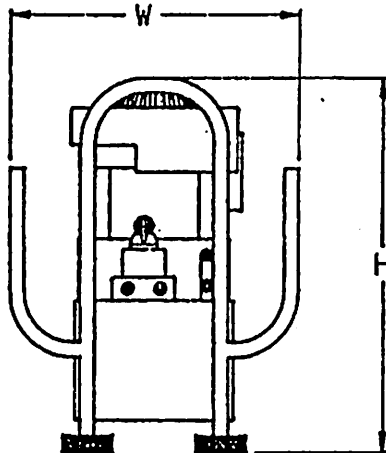

AMKUS, Inc. 4728 YENDER AVENUE, LISLE, IL 60532		REV. 0
SCALE : NOT-TO-SCALE	TITLE : MODEL B104-XL POWER PAK UNIT	
DATE : 8-27-90	MATERIAL : VARIES	HEAT TREAT : VARIES
DRAWN BY : <i>Alan J. Painter</i>	APPROVED BY : <i>Carl G. Johnson</i>	DRAWING NUMBER
ALAN J. PAINTER	CARL G. JOHNSON	B980007A